




SiSiB® PC6220 SILANE

- 1 -

CHEMICAL NAME

Vinyldimethylethoxysilane

CHEMICAL STRUCTURE

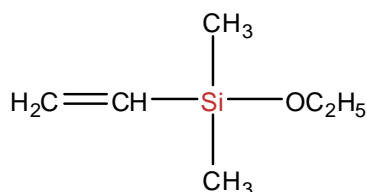

INTRODUCTION

SiSiB® PC6220 is a clear to straw liquid.

TYPICAL PHYSICAL PROPERTIES

CAS No.	5356-83-2
EINECS No.	226-341-7
Formula	C ₆ H ₁₄ OSi
Molecular Weight	130.26
Boiling Point	100°C [760mmHg]
Flash Point	4°C
Color and Appearance	Colorless transparent liquid
Density _{25/25°C}	0.79
Refractive Index	1.3983 [25°C]
Purity	99.0% by GC

APPLICATIONS

SiSiB® PC6220 can be used as end capping agent for vinyl silicone fluid and silicone rubber.

Power Chemical
ISO9001 ISO14001 certified

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia



SiSiB® PC6220 SILANE

- 2 -

PACKING AND STORAGE

SiSiB® PC6220 is supplied in net weight 160Kg steel drum.

In the unopened original container SiSiB® PC6220 has a shelf life of one year in a dry and cool place.

NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: silanes@SiSiB.com.

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia